

Ceresit



**Your perfect insulation system is here
Take your choice!**



Henkel

Quality for Professionals

About Henkel Group



Henkel Group is a leader with brands and technologies that make people's lives easier, better and more beautiful. As many as 50,000 people in 125 countries worldwide work for Henkel Group in strategic business sectors: Adhesives Technologies, Laundry & Home Care and Cosmetics/Toiletries. With Adhesive Technologies, Henkel is the world's market

leader in adhesives, sealants and surface treatments for consumers, craftsmen and industrial partners. An integral part of the Adhesive Technologies business sector is the Henkel Building Systems department. With our core categories – Tiling, Flooring, Waterproofing and Thermal Insulation – we provide an internationally acclaimed range of special products and system solutions to meet the needs of the construction industry and professional craftsmen. Our long-term experience, extensive know-how, highly innovative technologies and products help our customers to be more successful and efficient, while preserving the Earth's natural resources.

Henkel Building Systems help clients, consultants and constructors to continuously improve the quality of construction work. To ensure that application of all Henkel products and systems is of the best possible quality, we offer regular update through training sessions and seminars. Our sales and technical support consultants deliver high standard products solutions for the best professional results on site and for specific tailor-made needs. To build with Henkel Building Systems means to build with products, solutions and support based on "Quality for Professionals".



Environmental awareness

Henkel has been committed to sustainability ever since its foundation. Company's steady stream of innovations therefore combines immediate benefits for the environment and climate with invaluable benefits for health, safety and social welfare.

- Company's optimization of energy and water use combined with less raw material waste reduces resource consumption and minimizes CO₂ emissions during the production cycle.
- Specific product solutions, such as external thermal insulation systems for facades, enable the end-user to save on energy costs and actively contribute to environmental protection.
- Henkel not only offers comprehensive technical training for construction workers, but commits itself to responsible and ethically correct business practice.

Innovations

Henkel's extensive research and development generates a constant flow of innovative products and system solutions based on new technologies.

- Henkel bases its activities on a research and development approach whereby experienced chemists and engineers translate all pertinent market research findings into customized products that make hands-on work easier, faster and healthier.
- Company has implemented internal processes that specifically foster an innovative thinking process. The result: technologies are protected worldwide by more than 8,000 patents, with an additional 5,000 patents pending.

Professional know-how

Henkel's strength is its wealth of know-how. Company products and technologies provide professional users with tangible added value.

- Knowledge of Henkel's products and solutions is a major key to success on site, therefore company offer courses for knowledge transfer in its Training Centres worldwide.
- Dedicated project management teams provide support from the design phase right through to final project execution on site.
- Company's technical experts are always able to support and provide solutions throughout project realization. Whenever a question or problem arises, technical advisors are there to offer help.

ETICS competence

- Henkel's ETIC Systems are available to customers in more than 30 countries.
- On average 15 mln m² of facades is yearly insulated with our products.
- 20 factories is involved in producing products for ETICS System.
- Our network of laboratories is committed into development and quality watching of our products.
- Over 1000 colour mixing tinting stations for plasters and paints in the CEE region.
- We are proud of thousands of reference buildings successfully insulated with Ceresit Ceretherm ETICS Systems.




Our advanced plasters and paints

Our ETIC Systems guarantee optimal insulation performance and durability. We also care for attractive look and long lasting aesthetics of the facade. That is why Henkel's offer gives you especially wide choice of colours and textures answering any preferences of end-customers and architects.



Colours of Nature®

Wide choice of Ceresit Colours of Nature palette allows for finishing the facade with whatever shade you dream of. The colours derive from the beauty of nature and they are presented in four clear theme groups – WATER, SAND, EARTH and FOREST. You can choose from 211 colours, divided by colour gradations from the lightest to darkest.

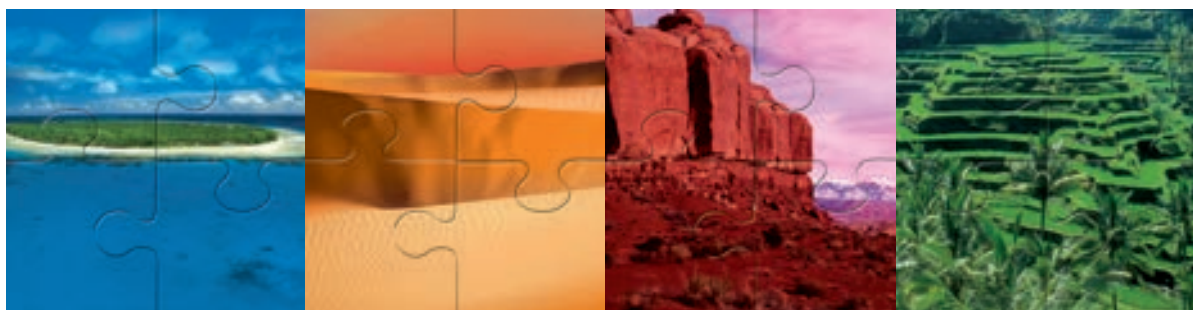

VISAGE




Natural effect plasters and paints VISAGE are newly introduced, attractive products. Inspired by nature and contemporary architectural trends they give you a wonderful possibility to finish the house with stone, wood or metal effect. As the real materials prove to be very expensive, difficult to transport and apply, VISAGE offers far more practical and affordable solution. Being lightweight they do not affect the building's structure and guarantee long-life effect.





BioProtect formula

Most of our plasters and paints are enriched with special BioProtect formula that was developed to protect the facade against biological contamination and the growth of fungi and algae. The release of active substances takes place gradually, in a controlled manner, ensuring a long-lasting effect.



Intense Colour System

Ceresit Intense Colour System is an entirely new, premium line of colours. It has been created to allow investors to finish facades in line with the latest trends, which favour intense and strong colours. The colour concept was inspired by the natural beauty of jewels, by their colour intensity and overall strength. 36 dark or intense colours are offered here, grouped into seven colour palettes, from emerald green to diamond grey.

The system has been intended for elastomeric plaster Ceresit CT 79, which is one of the key components of Ceresit Ceretherm Impactum System.





Ceresit Ceretherm ETICS Systems

Henkel offers a very wide choice of ETIC Systems tailored to varied needs. While all of them guarantee high insulating performance and durability, some have additional properties, such as for example exceptionally quick installation or the highest impact resistance. Whatever you choose, you can be sure to obtain a reliable, high quality insulation with carefully selected components.

Ceresit Ceretherm POPULAR

Basic insulation system, suitable for many premises. It is an economical solution that offers proper thermal insulating properties with its resistance to bad and changing weather conditions.

Ceresit Ceretherm CLASSIC

Reliable insulation system resistant to impacts and demanding weather conditions. It has an optimised self-cleaning and vapour permeability properties. Recommended and durable solution for most applications.

Ceresit Ceretherm PREMIUM

Highly durable insulation system with quick installation and excellent insulation properties. It is not only resistant to strong impacts but also has increased resistance to humidity. All these properties together with self-cleaning effect make the system a very reliable and long-lasting choice.

Economy & reliability



Durability & performance



Advanced durability & performance



Ceresit Ceretherm EXPRESS

Highly durable and reliable insulation system. It shares all advanced features and excellent insulation properties with convenience of being extremely quick in installation. Therefore it is an unbeatable solution in all cases, where time of completing an investment plays an important role.

Ceresit Ceretherm IMPACTUM

A unique insulation system with exceptional flexibility, strength and impressive impact resistance to over 100 J. It protects the building like a helmet, ensuring safety even in the most demanding weather conditions and also while at risk of strong mechanical damage. All these guarantee extreme durability and aesthetics for insulated facade.

Ceresit Ceretherm CLASSIC WOOL

Breathable and A2 class fire resistant system with soundproof properties. It offers high insulating performance while guaranteeing healthy living environment. Thanks to very high vapour permeability this insulation system is a perfect solution especially for all applications exposed to higher humidity and danger of biological contamination.

Ceresit Ceretherm PREMIUM WOOL

Insulation system with all the advantages of being breathable, A2 class fire resistant and soundproof but with enhanced durability and impact resistance. It is a perfect solution even for highly demanding applications with an additional asset of being quicker in installation.

Express installation & advanced durability



Highest impact resistance & durability



Breathability & performance



Advanced breathability & performance




Ceresit Ceretherm

POPULAR



Economy & reliability



CHARACTERISTICS

- low water uptake of the system
- durability
- BioProtect formula
- good workability parameters

Recommended substrates: aerated concrete (dry) well ventilated building, concrete, ceramic bricks and ceramic blocks

Recommended buildings: single family houses and blocks of flats up to 11 floors (up to 25 m)



The colour finish of the system is to be obtained with:




SPECIFICATION

1. Fixing	<ul style="list-style-type: none"> • Ceresit ZS Adhesive Mortar or Ceresit CT 81 Adhesive Mortar or Ceresit ZU Adhesive and Reinforcing Mortar or Ceresit CT 82 Adhesive and Reinforcing Mortar • plastic anchors Ceresit CT 330 or CT 335 with a steel core or others classified as ETAG 014 • number of fasteners and their arrangement should be determined by an architect, based on the substrate analysis and load calculations
2. Insulation material	EPS-boards marked Ceresit CT 315 (or others classified as PN-EN 13163:2004) with thickness up to 25 cm, with a flat or shaped end face
3. Reinforced layer	<ul style="list-style-type: none"> • Ceresit CT 325 Glass fibre mesh with a density of 145 g/m² and above • Ceresit ZU Adhesive and Reinforcing Mortar or Ceresit CT 82 Adhesive and Reinforcing Mortar
4. Priming paint	Ceresit CT 16 Acrylic Paint for mineral, acrylic, silicate-silicone and silicone plasters; Ceresit CT 15 Silicate Paint for silicate plasters
5. Plaster	recommended: Acrylic Plasters: Ceresit CT 60 „stone“, Ceresit CT 63 „rustic“, Ceresit CT 64 „rustic“ others: Silicate-silicone Plasters: Ceresit CT 174 „stone“, Ceresit CT 175 „rustic“; Silicate Plasters: Ceresit CT 72 „stone“, Ceresit CT 73 „rustic“; Silicone Plasters: Ceresit CT 74 „stone“, Ceresit CT 75 „rustic“; Mosaic Plaster: Ceresit CT 77; Mineral Plasters: Ceresit CT 35 „rustic“, Ceresit CT 137 „stone“
6. Paint	Acrylic Paints: Ceresit CT 42, Ceresit CT 44; Silicone Paint: Ceresit CT 48; Silicate Paint: Ceresit CT 54; Nanosilicone Paint Ceresit CT 49 Silix XD®

Ceresit Ceretherm CLASSIC



Durability & performance

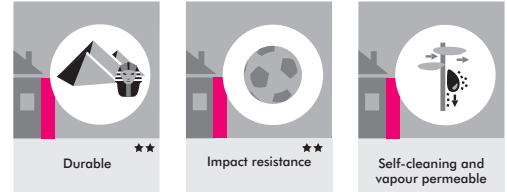

CHARACTERISTICS

- optimised self cleaning & vapour permeability properties
- durability
- BioProtect formula
- low water uptake of the system
- flexibility & resistance to mechanical damages
- very good working parameters

Recommended substrates: aerated concrete (dry) well ventilated building, concrete, ceramic bricks, ceramic blocks and uneven walls

Recommended buildings: single family houses, blocks of flats up to 11 floors (up to 25 m) and public buildings



The colour finish of the system is to be obtained with:



SPECIFICATION

1. Fixing	<ul style="list-style-type: none"> • Ceresit CT 83 Adhesive Mortar or Ceresit CT 85 Adhesive and Reinforcing Mortar • plastic anchors Ceresit CT 330 or CT 335 with a steel core or others classified as ETAG 014 • number of fasteners and their arrangement should be determined by an architect, based on the substrate analysis and load calculations
2. Insulation material	EPS-boards marked Ceresit CT 315 (or others classified as PN-EN 13163:2004) with thickness up to 25 cm, with a flat or shaped end face
3. Reinforced layer	<ul style="list-style-type: none"> • Ceresit CT 325 Glass fibre mesh with a density of 145 g/m² and above • Ceresit CT 85 Adhesive and Reinforcing Mortar
4. Priming paint	Ceresit CT 16 Acrylic Paint for mineral, acrylic, silicate-silicone and silicone plasters; Ceresit CT 15 Silicate Paint for silicate plasters
5. Plaster	<p>recommended: Silicate-silicone Plasters: Ceresit CT 174 „stone“, Ceresit CT 175 „rustic“</p> <p>others: Acrylic Plasters: Ceresit CT 60 „stone“, Ceresit CT 63 „rustic“, Ceresit CT 64 „rustic“; Silicate Plasters: Ceresit CT 72 „stone“, Ceresit CT 73 „rustic“; Silicone Plasters: Ceresit CT 74 „stone“, Ceresit CT 75 „rustic“; Mosaic Plaster: Ceresit CT 77; Mineral Plasters: Ceresit CT 35 „rustic“, Ceresit CT 137 „stone“</p>
6. Paint	Acrylic Paints: Ceresit CT 42, Ceresit CT 44; Silicone Paint: Ceresit CT 48; Silicate Paint: Ceresit CT 54; Nanosilicone Paint Ceresit CT 49 Silix XD®
6. Alternative finishing	VISAGE line plaster and paints: Ceresit CT 710, CT 60, CT 720 + CT 721, CT 730, CT 740, CT 750; ceramic tiles

Ceresit Ceretherm PREMIUM



Advanced durability & performance



CHARACTERISTICS

- self cleaning & dirt resistance
- high durability
- BioProtect formula
- very low water uptake of the system
- hydrophobic
- high flexibility and resistance to mechanical damages & weather/ temperature abrupt changes
- quick (no priming paint, saving on labour and scaffoldings)
- excellent working parameters:
 - easy & smooth application of mesh reinforced layer due to CT 87 optimized formula and consistency (new generation of fillers & organic modifiers; lower thickness and viscosity)
 - easier plasters application due to low water uptake of CT 87 & high adhesion strength
- lower consumption of rendering mortar per m² by 25%

Recommended substrates: aerated concrete (dry) well ventilated building, concrete, ceramic bricks and ceramic blocks

Recommended buildings: single family houses, blocks of flats up to 11 floors (up to 25 m) and public buildings

Especially recommended for: buildings located in high air humidity areas and buildings located in air polluted areas (close to roads, industrial areas)



The colour finish of the system is to be obtained with:




SPECIFICATION

1. Fixing	<ul style="list-style-type: none"> • Ceresit CT 83 Adhesive Mortar or Ceresit CT 87 2in1 White Adhesive and Reinforcing Mortar • plastic anchors Ceresit CT 330 or CT 335 with a steel core or others classified as ETAG 014 • number of fasteners and their arrangement should be determined by an architect, based on the substrate analysis and load calculations
2. Insulation material	EPS-boards marked Ceresit CT 315 (or others classified as PN-EN 13163:2004) with thickness up to 25 cm, with a flat or shaped end face
3. Reinforced layer	<ul style="list-style-type: none"> • Ceresit CT 325 Glass fibre mesh with a density of 145 g/m² and above • Ceresit CT 87 2in1 Adhesive and Reinforcing Mortar
4. Priming paint	not necessary
5. Plaster	recommended: Silicone Plasters: Ceresit CT 74 „stone“, Ceresit CT 75 „rustic“; others: Acrylic Plasters: Ceresit CT 60 „stone“, Ceresit CT 63 „rustic“, Ceresit CT 64 „rustic“; Silicate-silicone Plasters: Ceresit CT 174 „stone“, Ceresit CT 175 „rustic“; Silicate Plasters: Ceresit CT 72 „stone“, Ceresit CT 73 „rustic“; Mosaic Plaster: Ceresit CT 77; Mineral Plasters: Ceresit CT 35 „rustic“, Ceresit CT 137 „stone“;
6. Paint	Acrylic Paints: Ceresit CT 42, Ceresit CT 44; Silicone Paint: Ceresit CT 48; Silicate Paint: Ceresit CT 54; Nanosilicone Paint Ceresit CT 49 Silix XD®



Express installation & advanced durability

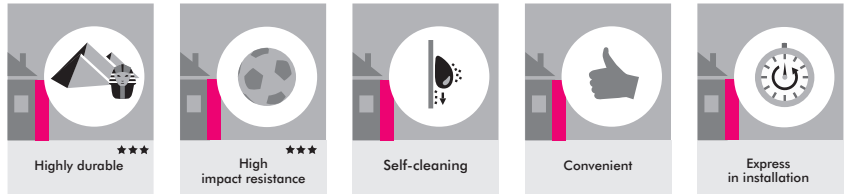

CHARACTERISTICS

- express - etics installation quicker by 5 days!
- self cleaning & dirt resistant
- high durability
- BioProtect formula
- very low water uptake of the system
- hydrophobic
- high flexibility and resistance to mechanical damages & weather/temperature abrupt changes
- lambda 0,040 w/mK of CT 84 – excellent insulation properties 25 times better then for cementitious eps adhesive
- excellent working parameters:
 - easy & convenient application of CT 84 vs cementitious eps adhesives
 - easy & smooth application of mesh reinforced layer due to CT 87 optimized formula and consistency (new generation of fillers & organic modifiers; lower thickness and viscosity)
 - easier plasters application due to low water uptake of CT 87 & high adhesion strength
- high efficiency per m²:
 - eps glueing higher efficiency by 100% vs cementitious eps adhesives
 - lower consumption of rendering mortar per m² by 25%
- glueing of eps in higher range of temperatures (0-40°C)

Recommended substrates: aerated concrete (dry) well ventilated building, ceramic blocks and even walls

Recommended buildings: single family houses, blocks of flats up to 11 floors (up to 25 m) and public buildings

Especially recommended for: buildings located in high air humidity areas and buildings located in air polluted areas (close to roads, industrial areas)



The colour finish of the system is to be obtained with:




SPECIFICATION

1. Fixing	<ul style="list-style-type: none"> • Ceresit CT 84 Express PU Adhesive • plastic anchors Ceresit CT 330 or CT 335 with a steel core or others classified as ETAG 014 • number of fasteners and their arrangement should be determined by an architect, based on the substrate analysis and load calculations
2. Insulation material	EPS-boards marked Ceresit CT 315 (or others classified as PN-EN 13163:2004) with thickness up to 25 cm, with a flat or shaped end face
3. Reinforced layer	<ul style="list-style-type: none"> • Ceresit CT 325 Glass fibre mesh with a density of 145 g/m² and above • Ceresit CT 87 2in1 Adhesive and Reinforcing Mortar
4. Priming paint	not necessary
5. Plaster	recommended: Silicone Plasters: Ceresit CT 74 „stone“, Ceresit CT 75 „rustic“; others: Acrylic Plasters: Ceresit CT 60 „stone“, Ceresit CT 63 „rustic“, Ceresit CT 64 „rustic“; Silicate-silicone Plasters: Ceresit CT 174 „stone“, Ceresit CT 175 „rustic“; Silicate Plasters: Ceresit CT 72 „stone“, Ceresit CT 73 „rustic“; Mosaic Plaster: Ceresit CT 77
6. Paint	Acrylic Paints: Ceresit CT 42, Ceresit CT 44; Silicone Paint: Ceresit CT 48; Silicate Paint: Ceresit CT 54; Nanosilicone Paint Ceresit CT 49 Silix XD®



Highest impact resistance & durability

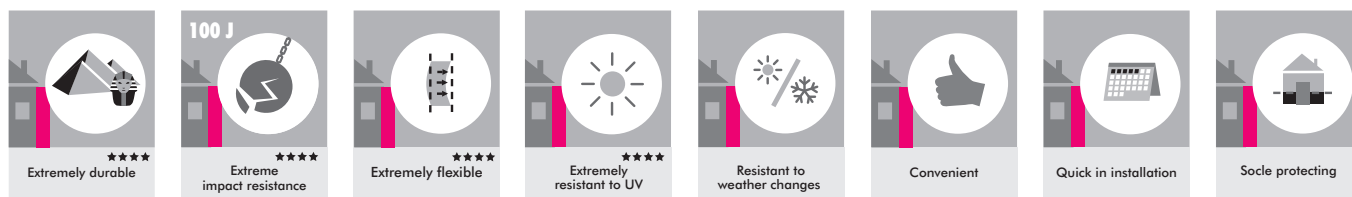

CHARACTERISTICS

- extreme durability
- extreme flexibility and impact resistance to mechanical damages (100 J) & weather/temperature abrupt changes & thermal stresses
- strengthened with carbon, glass and polyacrylamide fibres
- extreme UV resistance
- highly hydrophobic (deep structural hydrophobisation)
- extremely low water uptake of the system
- high resistance to biological contamination (structure & structural hydrophobicity)
- self cleaning & dirt resistant
- excellent working parameters
- quick & convenient in installation (rendering mortar R2U – no priming paint)
- possible use of dark and intense colours (HBW \geq 5%) on facades

Recommended substrates: aerated concrete (dry) well ventilated building, concrete, ceramic bricks and ceramic blocks

Recommended buildings: single family houses, blocks of flats up to 11 floors (up to 25 m) and public buildings

Especially recommended for: buildings located in areas with high temperatures difference, tough weather conditions and strong UV exposure, buildings located in high air humidity areas and buildings located in air polluted areas (close to roads, industrial areas)

Strongly recommended for: socles, fronts of buildings and entrances



The colour finish of the system is to be obtained with:



SPECIFICATION

1. Fixing	<ul style="list-style-type: none"> • Ceresit CT 83 Adhesive Mortar (optionally ZS/CT 81, Thermo Universal, ZU/CT 82) • plastic anchors Ceresit CT 330 or CT 335 with a steel core or others classified as ETAG 014 • number of fasteners and their arrangement should be determined by an architect, based on the substrate analysis and load calculations
2. Insulation material	EPS-boards marked Ceresit CT 315 (or others classified as PN-EN 13163:2004) with thickness up to 25 cm, with a flat or shaped end face
3. Reinforced layer	<ul style="list-style-type: none"> • Ceresit CT 325 Glass fibre mesh with a density of \geq 160 g/m², Ceresit CT 327 Glass fibre mesh with a density of \geq 330 g/m² • Ceresit CT 100
4. Priming paint	not necessary
5. Plaster	<p>recommended: Elastomeric Plaster: Ceresit CT 79;</p> <p>others: Acrylic Plaster: Ceresit CT 60 „stone“; Silicate-silicone Plaster: Ceresit CT 174 „stone“; Silicate Plaster: Ceresit CT 72 „stone“; Silicone Plaster: Ceresit CT 74 „stone“; Mosaic Plaster: Ceresit CT 77</p>
6. Paint	Acrylic Paints: Ceresit CT 42, Ceresit CT 44; Silicone Paint: Ceresit CT 48; Silicate Paint: Ceresit CT 54; Nanosilicone Paint Ceresit CT 49 Silix XD®

Ceresit Ceretherm CLASSIC WOOL



Breathability & performance



CHARACTERISTICS

- high vapour permeability
- durability
- BioProtect formula strengthened by high pH - high resistance to biological contamination
- flexibility & resistance to mechanical damages
- A2 class fire resistance (non flammable)
- soundproof (mineral wool)
- natural - eco wool plates & silicate plaster
- very good working parameters

Recommended substrates: wood skeleton walls with cement fibres boards, aerated concrete (dry) poorly ventilated, aerated concrete (wet) and silicate bricks

Recommended buildings: single family houses, blocks of flats up to 11 floors, blocks of flats above 11 floors and public buildings (especially schools, hospitals, theatres)

Especially recommended for: buildings located close to forests, buildings located in high air humidity areas, public buildings with high risk of biological contamination



The colour finish of the system is to be obtained with:



SPECIFICATION

1. Fixing	<ul style="list-style-type: none"> • Ceresit CT 180 Adhesive Mortar or Ceresit CT 190 Adhesive and Reinforcing Mortar • plastic anchors Ceresit CT 335 with a steel core or others classified as ETAG 014 • number of fasteners and their arrangement should be determined by an architect, based on the substrate analysis and load calculations
2. Insulation material	mineral wool with a disturbed fibre layout or mineral wool with lamella fibre layout (so-called lamella wool) classified as EN 13162:2001
3. Reinforced layer	<ul style="list-style-type: none"> • Ceresit CT 325 Glass fibre mesh with a density of 145 g/m² and above • Ceresit CT 190 Adhesive and Reinforcing Mortar
4. Priming paint	Ceresit CT 15 Silicate Paint for silicate plasters; Ceresit CT 16 Acrylic Paint for mineral, acrylic, silicate-silicone and silicone plasters
5. Plaster	recommended: Silicate Plasters: Ceresit CT 72 „stone“, Ceresit CT 73 „rustic“; others: Silicate-silicone Plasters: Ceresit CT 174 „stone“, Ceresit CT 175 „rustic“; Silicone Plasters: Ceresit CT 74 „stone“, Ceresit CT 75 „rustic“; Mineral Plasters: Ceresit CT 35 „rustic“, Ceresit CT 137 „stone“
6. Paint	Silicate Paint: Ceresit CT 54; Silicone Paint: Ceresit CT 48; Nanosilicone Paint Ceresit CT 49 Silix XD®

Ceresit Ceretherm PREMIUM WOOL



Advanced breathability & performance



CHARACTERISTICS

- high vapour permeability
- high durability
- BioProtect formula strengthened by high pH - high resistance to biological contamination
- high flexibility and resistance to mechanical damages & weather/temperature abrupt changes
- A2 class fire resistance (non flammable)
- soundproof (mineral wool)
- natural - eco wool plates & silicate plaster
- excellent working parameters:
 - easy & smooth application (new generation of fillers & organic modifiers; lower thickness and viscosity, optimised consistency for easy application)
 - easier plasters application due to low water uptake of CT 87 & high adhesion strength
- quick (no priming, saving on labour and scaffoldings)
- lower consumption of rendering mortar per m² by 15%

Recommended substrates: wood skeleton walls with cement fibres boards, aerated concrete (dry) poorly ventilated, aerated concrete (wet) and silicate bricks

Recommended buildings: single family houses, blocks of flats up to 11 floors, blocks of flats above 11 floors and public buildings (especially schools, hospitals, theatres)

Especially recommended for: buildings located close to forests, buildings located in high air humidity areas, public buildings with high risk of biological contamination




The colour finish of the system is to be obtained with:



SPECIFICATION

1. Fixing	<ul style="list-style-type: none"> • Ceresit CT 190 Adhesive and Reinforcing Mortar or Ceresit CT 87 2in1 White Adhesive and Reinforcing Mortar • plastic anchors Ceresit CT 335 with a steel core or others classified as ETAG 014 • number of fasteners and their arrangement should be determined by an architect, based on the substrate analysis and load calculations
2. Insulation material	mineral wool with a disturbed fibre layout or mineral wool with lamella fibre layout (so-called lamella wool) classified as EN 13162:2001
3. Reinforced layer	<ul style="list-style-type: none"> • Ceresit CT 325 Glass fibre mesh with a density of 145 g/m² and above • Ceresit CT 87 2in1 Adhesive and Reinforcing Mortar
4. Priming paint	not necessary
5. Plaster	recommended: Silicate Plasters: Ceresit CT 72 „stone“, Ceresit CT 73 „rustic“; others: Silicate-silicone Plasters: Ceresit CT 174 „stone“, Ceresit CT 175 „rustic“; Silicone Plasters: Ceresit CT 74 „stone“, Ceresit CT 75 „rustic“; Mineral Plasters: Ceresit CT 35 „rustic“, Ceresit CT 137 „stone“
6. Paint	Silicate Paint: Ceresit CT 54; Silicone Paint: Ceresit CT 48; Nanosilicone Paint Ceresit CT 49 Silix XD®

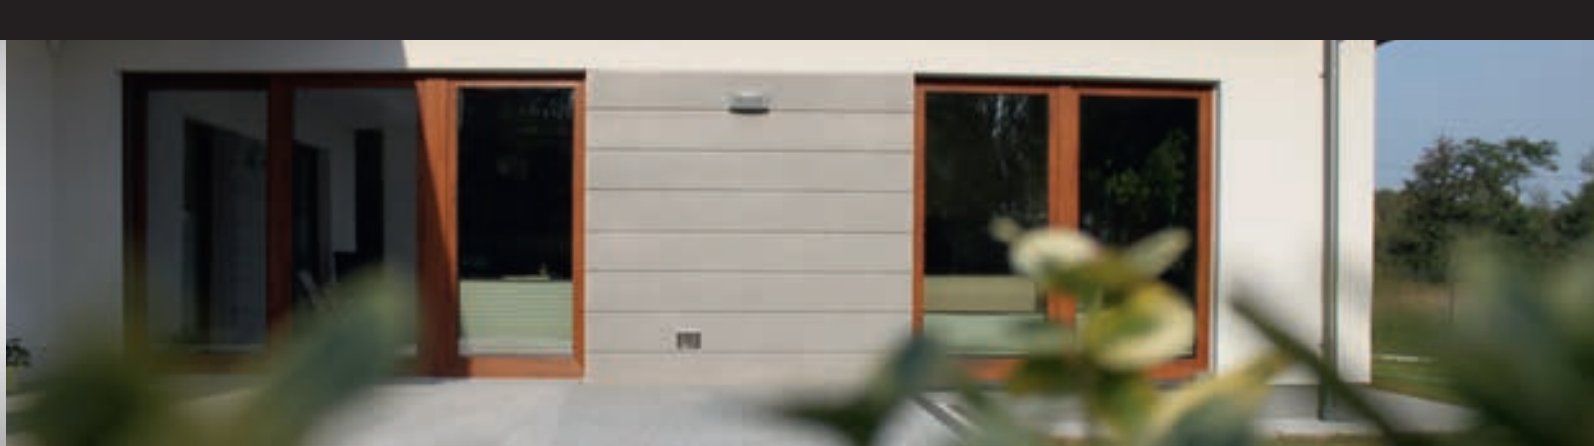

Properties of Ceresit Ceretherm Systems

Insulation material	EPS BOARDS					MINERAL WOOL BOARDS	
	Popular with acrylic plaster	Classic with silicate-silicone plaster	Premium with silicone plaster	Express with silicone plaster	Impactum with CT 79 plaster	Classic Wool with silicate plaster	Premium Wool with silicate plaster
Resistance to biological contamination	●●	●●	●●●●	●●●●	●●●●●	●●●●●	●●●●●
Mechanical resistance	●	●●	●●●●	●●●●	●●●●●	●●	●●●●
Weather resistance	●	●●	●●●●	●●●●	●●●●●	●●	●●
Breathability	●	●●	●●	●●	●●	●●●●	●●●●●
Acoustic proof	●	●	●	●	●	●●	●●
Time saving/quick application	●	●	●●	●●●●	●●●●	●	●●
Convenient application	●	●	●●	●●●●	●●●●	●	●●
Ceresit colour finish/ possible finish	Colours of Nature®	Colours of Nature® VISAGE ceramic tiles	Colours of Nature®	Colours of Nature®	Colours of Nature® Intense	Colours of Nature®	Colours of Nature®

Legend:

- – good
- – very good
- – excellent
- – recommended as the best

Ceresit

Kilsaran
INTERNATIONAL

Ireland

Kilsaran International
Brownstown, Kilcullen, Co. Kildare, Ireland.
Tel: +353 (0)45 480620 or Locall 1890 92 99 92 (ROI only)
Email: info@kilsaran.ie

UK

Kilsaran International
2nd Floor Lowry Mill, Lees Street, Pendlebury, Swinton, Manchester M276DB
Tel: +44 (0)161 872 8899
Email: info@kilsaraninternational.co.uk

Henkel CEE

Erdbergstr. 29
1030 Vienna
www.ceresit.com
www.ceresit-impactum.com
www.ceresit-visage.com

Henkel

Quality for Professionals